

# SKC08-E S

RKF Magnetic Blow-out Power Relay Socket



## Characteristics







SKC08-E S




Type			SKC08-E S
Nominal load	Current	A	15
	Voltage	V	300
Dielectric strength	Between coil and contact	V/min	4000
	Between contacts	V/min	2500
Max. tightening torque	Nm	-	
Wire size	AWG/mm <sup>2</sup>	20-16/0.5-1.5	
Ambient temperature	°C	-40~+85	
Unit weight	g	50	

### Accessories


Socket	Plastic clip	Metal clip	ID tag	Module
SKC08-E S	 SK36F	 SK36M	 SK4P	 AMD

## Dimensions (mm)

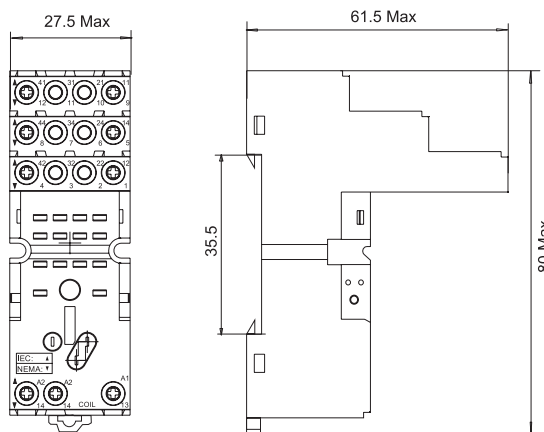

SKC08-E S

## Connection Diagrams



- ⑬ ⑭ : A1 A2
- ① ④ : NC
- ⑤ ⑧ : NO
- ⑨ ⑫ : COM

SKC08-E S